



F 430 PVDF - 40/33

F 430 PVDF - 40/33 Z

F 430 PVDF - 50/38

F 430 PVDF - 50/43 Z

Parts included in Maintenance Kits
are circled on the exploded view and
in **BOLD** on the parts list.

Ersatzteilliste 430 80 024 · 03/14

Fasspumpe aus Polyvinylidenfluorid (PVDF)

Spare parts list


Barrel Pump in Polyvinylidenfluoride (PVDF)

Liste de pièces de rechange

Pompe Vide-fûts en Polyfluorure de vinylidène (PVDF)



FLUX-GERÄTE GMBH
Talweg 12 · D-75433 Maulbronn
Tel. +49 (0)7043 101-440 · Fax +49 (0)7043 101-444
info@flux-pumpen.de · www.flux-pumpen.de

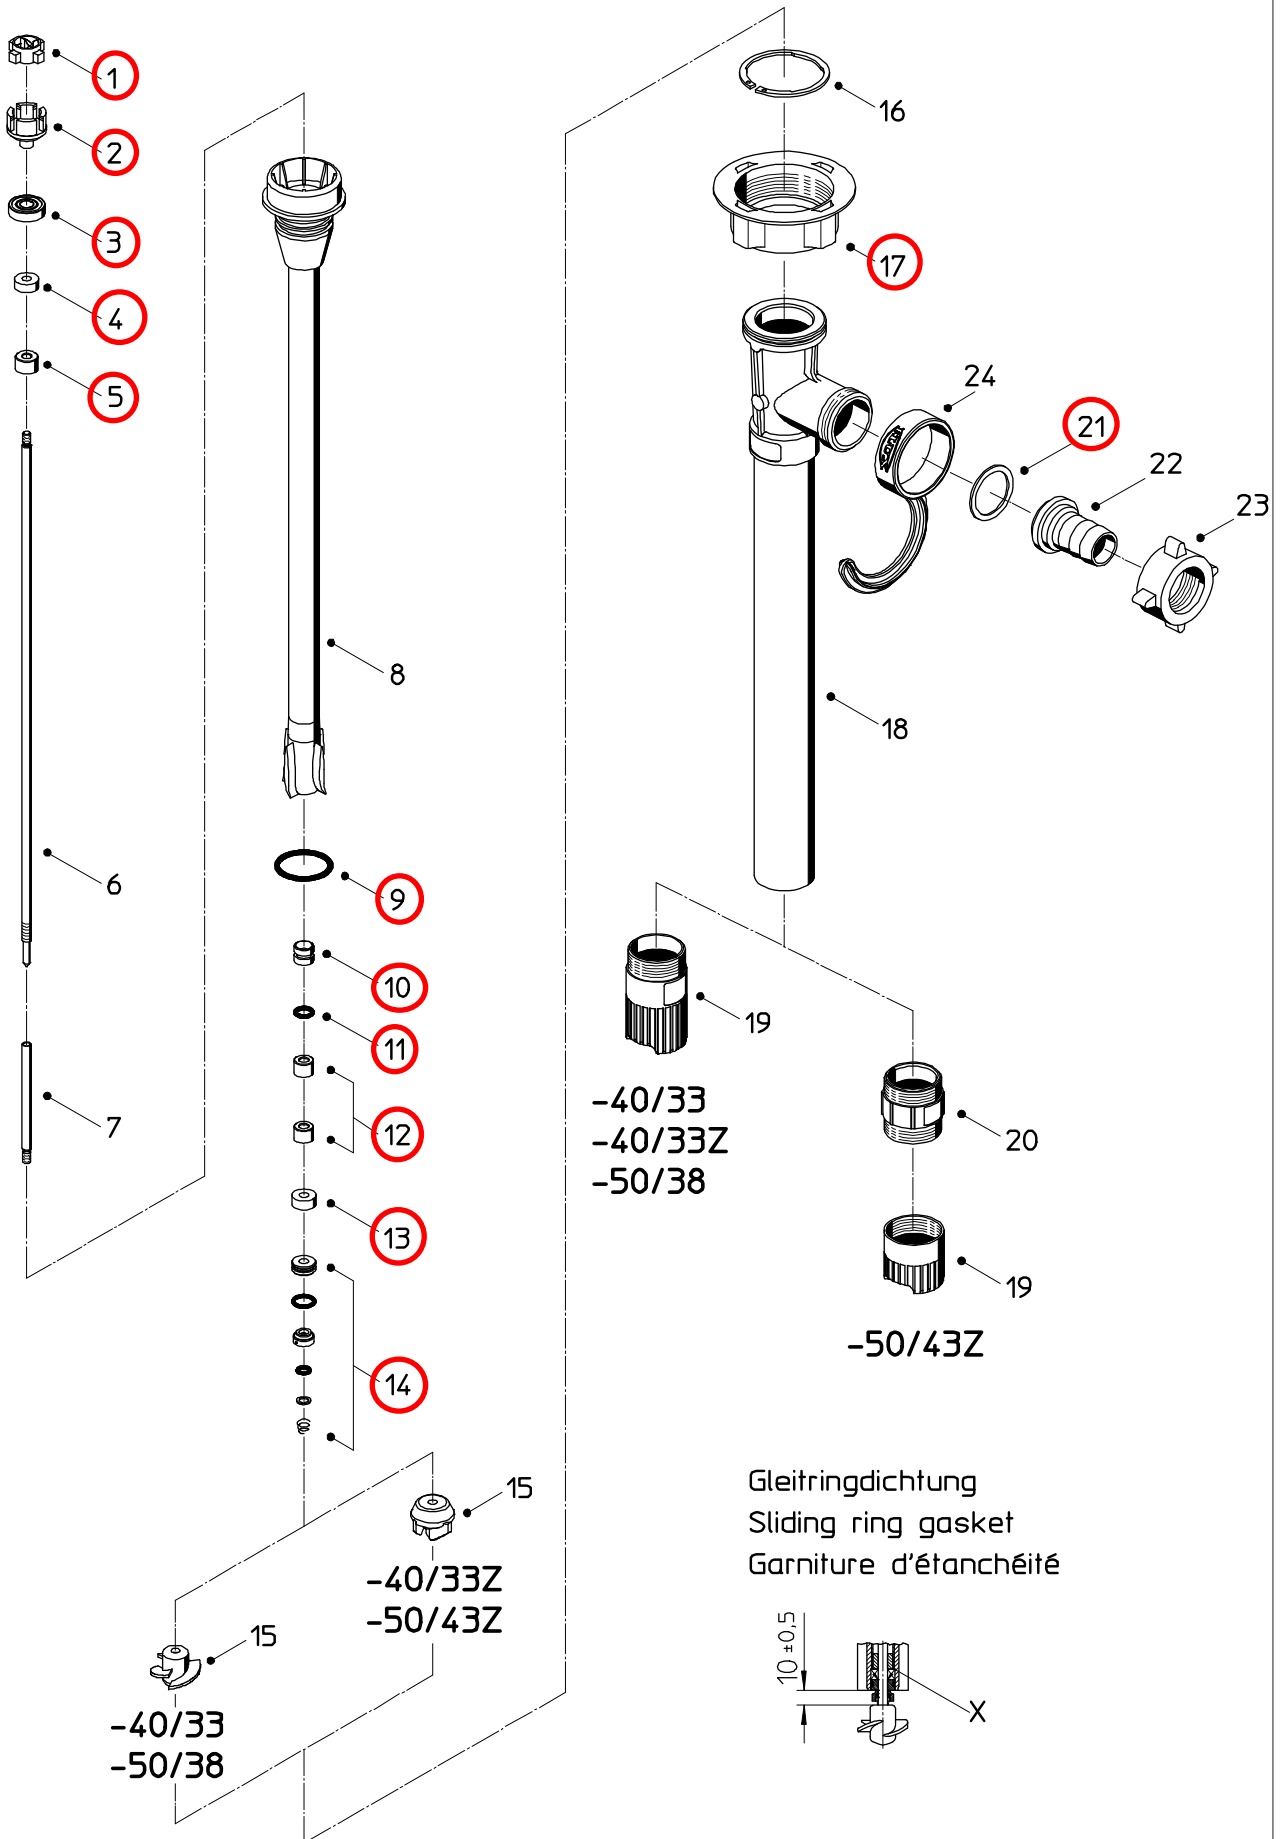

Pos. Nr. Rep.	Stück/ Gerät Qty./ Unit Qté./ Unité	Bestellbezeichnung	Bestell-Nr. / Part No. / Référence				Description
			F 430 PVDF -40/33	F 430 PVDF -40/33Z	F 430 PVDF -50/38	F 430 PVDF -50/43Z	
	1	Innenrohr kpl., Pos. 1-15 Eintauchtiefe 700mm Eintauchtiefe 1000mm Eintauchtiefe 1200mm	430 90 061 430 90 062 430 90 063	430 90 084 430 90 085 430 90 086	430 90 112 430 90 113 430 90 114	430 90 142 430 90 143 430 90 144	Inner tube cpl., Pos. 1-15 Immersion length 700mm Immersion length 1000mm Immersion length 1200mm
	1	Außenrohr kpl., Pos. 16-20 Eintauchtiefe 700mm Eintauchtiefe 1000mm Eintauchtiefe 1200mm	430 90 160 430 90 161 430 90 162	430 90 176 430 90 177 430 90 178	430 90 194 430 90 195 430 90 196	430 90 214 430 90 215 430 90 216	Outer tube cpl., Pos. 16-20 Immersion length 700mm Immersion length 1000mm Immersion length 1200mm
	1	Kupplungskäfig kpl., Pos 1-3	425 22 000	425 22 000	425 22 000	425 22 000	Coupling cage cpl., Pos. 1-3
1	1	Kupplungsstern	410 14 028	410 14 028	410 14 028	410 14 028	Coupling star
2	1	Kupplungskäfig	420 51 275	420 51 275	420 51 275	420 51 275	Coupling cage
3	1	Rillenkugellager	922 40 005	922 40 005	922 40 005	922 40 005	Grooved ball bearing
4	1	elIW endichtring	925 10 001	925 10 001	925 10 001	925 10 001	Shaft seal (NBR)
5	1	(NBR) Lager	920 51 013	920 51 013	920 51 013	920 51 013	Slide bearing
6	1	Obere Welle Eintauchtiefe 700mm Eintauchtiefe 1000mm Eintauchtiefe 1200mm	430 41 307 430 41 310 430 41 312	430 41 307 430 41 310 430 41 312	430 41 307 430 41 310 430 41 312	430 41 307 430 41 310 430 41 312	Upper shaft Immersion length 700mm Immersion length 1000mm Immersion length 1200mm
7	1	Untere Welle	430 41 331	430 41 331	430 41 331	430 41 331	Lower shaft
8	1	Innenrohr mit Pos. 10 und 12 Eintauchtiefe 700mm Eintauchtiefe 1000mm Eintauchtiefe 1200mm	430 90 037 430 90 038 430 90 039	430 90 037 430 90 038 430 90 039	430 90 027 430 90 028 430 90 029	430 90 027 430 90 028 430 90 029	Inner tube with Pos. 10 and 12 Immersion length 700mm Immersion length 1000mm Immersion length 1200mm
9	1	O-Ring Ø 32,2 x 3 (FKM)	925 65 003	925 65 003	925 65 003	925 65 003	O-ring Ø 32,2 x 3 (FKM)
	1	O-Ring Ø 32 x 3 (EPDM)*	925 65 026	925 65 026	925 65 026	925 65 026	O-ring Ø 32 x 3 (EPDM)*
10		Stützlager mit Pos. 11	920 51 010	920 51 010	920 51 010	920 51 010	Support bearing with Pos. 11
	3	Eintauchtiefe 700mm					Immersion length 700mm
	5	Eintauchtiefe 1000mm					Immersion length 1000mm
	6	Eintauchtiefe 1200mm					Immersion length 1200mm
11		O-Ring Ø 9 x 2,25 (NBR)	925 13 004	925 13 004	925 13 004	925 13 004	O-ring Ø 9 x 2,25 (NBR)
12	2	Gleitlager	920 51 014	920 51 014	920 51 014	920 51 014	Slide bearing
13	1	Wellendichtring (FKM)	925 11 001	925 11 001	925 11 001	925 11 001	Shaft seal (FKM)
14	1	Gleitringdichtung (FKM) alternativ: 1 Gleitringdichtung (FKM-Balg) 1 Gleitringdichtung (EPDM)*	958 25 055 958 25 067 958 25 110	958 25 055 958 25 067 958 25 110	958 25 055 958 25 067 958 25 110	958 25 055 958 25 067 958 25 110	Sliding ring gasket (FKM) optional: Sliding ring gasket (FKM-bellows) Sliding ring gasket (EPDM)*
X	nach	Ausgleichsscheibe Ø 6,5 x Ø 15,5 x 0,5	908 06 011	908 06 011	908 06 011	908 06 011	Comp. washer Ø 6,5 x Ø 15,5 x 0,5
X	Bedarf	Ausgleichsscheibe Ø 6,5 x Ø 15,5 x 1	908 06 012	908 06 012	908 06 012	908 06 012	Comp. washer Ø 6,5 x Ø 15,5 x 1
15	1	Rotor	430 41 300	425 21 158	420 24 296	430 41 301	Impellor
16	1	Sicherungsring	918 80 002	918 80 002	918 80 002	918 80 002	Circlip
17	1	Überwurfmutter	907 90 070	907 90 070	907 90 070	907 90 070	Union nut
18	1	Außenrohr mit Pos. 19 (und 20) Eintauchtiefe 700mm Eintauchtiefe 1000mm Eintauchtiefe 1200mm	430 91 083 430 91 086 430 91 088	430 91 121 430 91 124 430 91 126	430 91 169 430 91 172 430 91 174	430 91 227 430 91 230 430 91 232	Outer tube with Pos. 19 (and 20) Immersion length 700mm Immersion length 1000mm Immersion length 1200mm
19	1	Fußstück	430 61 198	430 61 199	430 61 291	430 61 200	Foot piece
20	1	Adapter	-	-	-	430 61 201	Adaptor
		Lebensmittel-Schmierfett / kg (für Wellendichtringe und Innenrohr)	952 00 012	952 00 012	952 00 012	952 00 012	Food grade grease / kg (for shaft seals and inner tube)
		Zubehör:					Accessories:
21	1	Schlauchanschluss DN 19, Pos. 21-23	959 04 101	959 04 101	959 04 101	959 04 101	Hose connection DN 19, Pos. 21-23
	1	Flachdichtung	925 64 003	925 64 003	925 64 003	925 64 003	Flat seal
22	1	Schlauchstecker DN 19	959 05 084	959 05 084	959 05 084	959 05 084	Hose connector DN 19
23	1	Knebelüberwurfmutter G 1 1/4	907 90 026	907 90 026	907 90 026	907 90 026	Nut for hose connector G 1 1/4
		wahlweise:					optional:
21	1	Schlauchanschluss DN 25, Pos. 21-23	959 04 102	959 04 102	959 04 102	959 04 102	Hose connection DN 25, Pos. 21-23
	1	Flachdichtung	925 64 003	925 64 003	925 64 003	925 64 003	Flat seal
22	1	Schlauchstecker DN 25	959 05 085	959 05 085	959 05 085	959 05 085	Hose connector DN 25
23	1	Knebelüberwurfmutter G 1 1/4	907 90 026	907 90 026	907 90 026	907 90 026	Nut for hose connector G 1 1/4
24	1	FLUX-Clip	001 10 424	001 10 424	001 10 424	001 10 424	FLUX-Clip
		* als Sonderausführung lieferbar					* available as special version